


50-160/5.5 (5.5kW) MEI > 0.40 – impeller diameter = 154 mm
 50-160/7.5 (7.5kW) MEI > 0.40 – impeller diameter = 166 mm

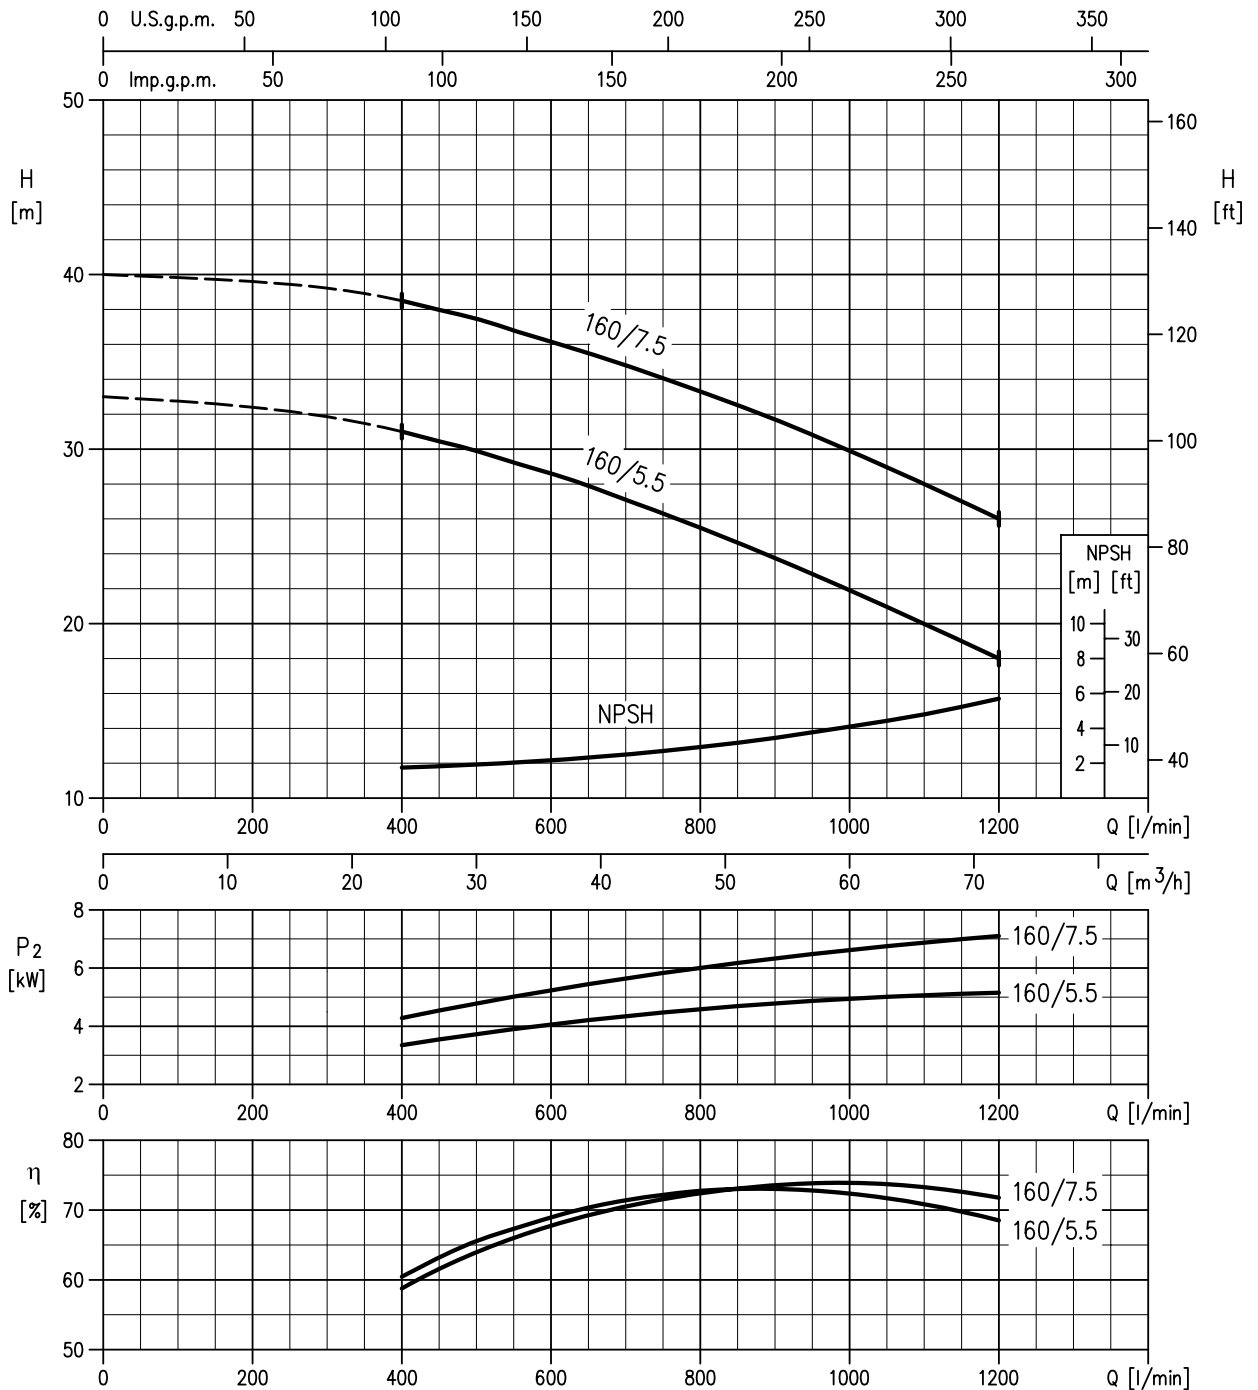

Rotation speed ≈ 2900 min⁻¹
 Test standard: ISO 9906:2012 - Grade 3B